




10/504286  
PCT/GB 2003 / 0 0 0 9 2 1



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

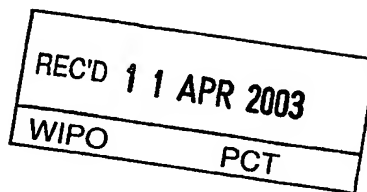


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

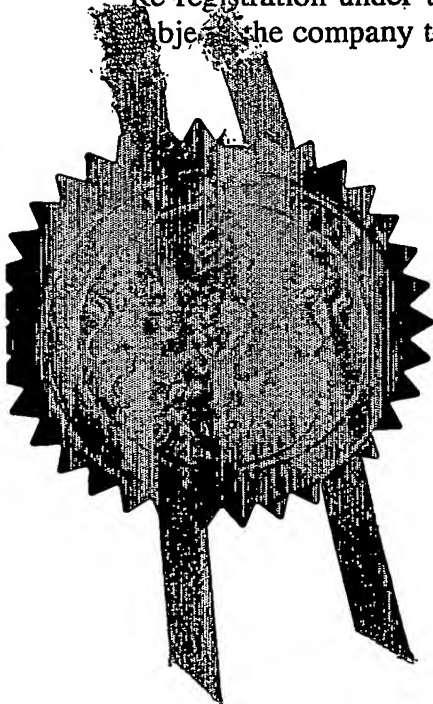

Signed *Andrews*

Dated 17 March 2003

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**BEST AVAILABLE COPY**

06MAR02 E701247-1 D02903

P01 0.00-0205249.6

Patents Form 1/77

Patents Act 1977  
(Rule 16)The  
Patent  
Office

1/77

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	10976P4 GB/EC		
2. Patent application number (The Patent Office will fill in this part)	0205249.6		E 6 MAR 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Reckitt Benckiser N.V. Kantoorgebouw De Appelaer Fruittuinen 2-12 2132 NZ Hoofddorp NETHERLANDS  Patents ADP number (if you know it) 07921075005  If the applicant is a corporate body, give the country/state of its incorporation Netherlands		
4. Title of the invention	Improvements in or relating to a Container		
5. Name of your agent (if you have one)	Andrew Stephen BROWN Reckitt Benckiser plc Group Patents Department Dansom Lane HULL HU8 7DS UNITED KINGDOM  Patents ADP number (if you know it) 08079311001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application (day / month / year)	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

## Patents Form 1/77

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

## Continuation sheets of this form

Description	12	✓
Claim(s)	4	✓
Abstract	1	✓
Drawing(s)	4	✓

RV

10. If you are also filing any of the following, state how many against each item.

Priority documents  
Translations of priority documents

Statement of inventorship and right  
to grant of a patent (Patents Form 7/77)

Request for preliminary examination  
and search (Patents Form 9/77)

One ✓

Request for substantive examination  
(Patents Form 10/77)

One ✓


Any other documents  
(please specify)

FS2 ✓

11. I/We request the grant of a patent on the basis of this application.

Signature

Date



Andrew S Brown

6 March 2002

12. Name and daytime telephone number of  
Person to contact in the United Kingdom

Andrew S Brown (01482) 582411

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patents Office.

Patents Form 1/77

DUPLICATE

5     Improvements in or relating to a Container

The present invention is related to a device for receiving and holding a plurality of unit doses of a detergent composition and/or additive and for individually dispensing said unit doses into an automatic  
10     dishwashing machine over a plurality of washing cycles as well as a blister pack for use with such a device.

In known automatic dishwashing machines, the detergent, whether in powder, tablet or gel form, is usually filled manually by the user into the machine, in particular into  
15     a detergent holder, before each dishwashing operation. Because of the necessity of handling the dishwashing detergent each and every time when a dishwashing cycle is to be started, this filling process is inconvenient, even with detergents in tablet form, when the problem of exact  
20     metering of the detergent and possible spillage thereof is avoided, which is an additional problem for powder and gel detergents. Moreover, even with careful handling, direct contact of the detergent with the user's skin is difficult to avoid in the usual filling process, which is  
25     again inconvenient because of the nature of usual detergent compositions.

From the prior art, a number of devices are known for holding unit doses of a detergent composition or additive, such as detergent tablets, and for dispensing  
30     of such unit doses into a machine.

2-

5 For example, WO 88/06199 discloses a loader for holding  
and dispensing a washing additive including a receptacle  
in which there is a plurality of compartments each for  
receiving washing additive tablets. The compartments are  
at least partially defined by partitions forming part of  
10 a body, which is movable to bring each tablet adjacent to  
an opening provided in the receptacle. The tablets then  
pass through the opening to be dispensed, preferably  
under force of gravity.

Another device for dispensing of detergent tablets is  
15 described in DE 43 44 205 A1. The dosing device disclosed  
therein is mounted on the door of a dishwashing machine  
and loaded with a number of detergent tablets. The dosing  
device has an ejector for dispensing a single tablet each  
time the dishwashing machine is used. In a preferred  
20 embodiment, the dosing device has a reception shaft for  
receiving the detergent tablets one after the other, with  
the ejector being located at the bottom end of the shaft.

WO 01/07703 discloses a device for the metered release of  
a detergent composition or additive into a dishwashing  
25 machine having a number of separate closed chambers for  
holding the detergent composition or additive and means  
for opening the chambers, activated by conditions within  
the machine.

The object of the present invention is to provide for an  
30 improved device of above-defined type, i.e. for holding  
and individually dispensing unit doses of a detergent

3 -

5 composition and/or additive into an automatic dishwashing machine, which allows a two-step release mechanism wherein, in the first step, a unit dose of a detergent composition and/or additive is transferred into a position from which it can, in a second step, be released  
10 into the machine with minimum energy required.

This object is achieved with a device of the kind referred to hereinabove, wherein the device comprises (i) a housing adapted to receive said plurality of unit doses each separately contained in a package or compartment  
15 thereof, (ii) means for opening said package or compartment or for at least partly ejecting said unit dose therefrom; and (iii) means to allow access of water or wash liquor to said unit doses contained in the opened package or compartment or ejected therefrom within a  
20 controlled time period after opening thereof to allow dissolution of the unit dose into the water or wash liquor of the machine.

Preferably, a holding pocket is provided for to receive and hold said unit dose, if ejected from the package or  
25 compartment, and means to controllably open and close the access of water or wash liquor to said holding pocket.

In an alternative embodiment the access of water or wash liquor to said unit dose, if contained in the opened package or compartment, is accomplished by a passageway  
30 between the interior of the machine and the opened

4 -

5 package, said device having means to controllably open  
and close said passageway.

Preferably, the holding pocket or passageway is provided  
with a hinged or sliding door.

In one preferred embodiment of the invention, the access  
10 of water or wash liquor to said unit dose contained in  
the opened package or compartment or ejected therefrom is  
controlled by means reactive to a condition reached  
during the washing cycle of the machine, preferably by  
means reactive to the specific temperature of the wash  
15 liquor.

Alternatively, the access of water or wash liquor to said  
unit dose contained in the opened package or compartment  
or ejected therefrom is time controlled.

Said means for ejecting the unit dose from said package  
20 or compartment, in a preferred embodiment, comprises an  
ejector to act on at least one face of said package or  
compartment.

In an alternative embodiment, said means for opening said  
package or compartment comprises a piercing or cutting  
25 means to penetrate at least one of the package or  
compartment walls.

5-

5 Preferably, said housing is adapted to receive a blister pack comprising said plurality of unit doses.

In a preferred embodiment, the device of the present invention is a portable device.

10 The invention is also related to a blister pack for use with a device according to the present invention.

Such blister pack is preferably in the form of a wheel-like plate with the unit doses arranged in at least one circle along the circumference thereof, or, alternatively, in the form of a row of unit doses  
15 arranged in a flexible loop.

The unit dose may be a detergent or detergent additive tablet or a detergent or detergent additive gel.

For the purpose of the present application, the term "unit dose" is used to mean the amount of detergent  
20 composition and/or additive required for one washing cycle of the automatic dishwashing machine. This amount can be provided for in any suitable form, such as powders, granules, gels, and liquids, optionally contained in pouches or formulated into tablets, and any  
25 mixtures thereof. For example, a unit dose might consist of a detergent powder composition and an additive in gel form contained in a pouch. For illustration purposes, but not restricted to this embodiment, the following more



6-

5 specific examples refer to a unit dose in the form of a tablet.

The device according to the present invention meets the objects as identified hereinabove in a surprisingly simple, effective and reliable way.

10 An important advantage of the device of the present invention is that it allows a two-step operation, namely, in a first step, opening the package or compartment containing a unit dose such as a tablet, or ejecting such unit dose from such package or compartment by means  
15 operated by the user immediately before the start of each washing cycle, and, in a second step, releasing the unit dose into the water or wash liquor of the machine at a controlled later stage, e.g. when a specific temperature in the machine is reached. By separating those two steps,  
20 it is possible to provide for a semi-automatic device for dispensing detergent unit doses into the machine in an easy and reliable way. It is not required to have any complicated automatic mechanism, for example, to be combined with the electronics or mechanics of the machine  
25 to open the package or eject the unit dose therefrom. Rather, the consumer is to operate the means of the device of the present invention for this part of the required operation. As substantial energy would usually be required for the first step, i.e. for opening the  
30 package or compartment or for ejecting the unit dose therefrom, it is possible to use the energy input from the consumer for such operation and to avoid providing for such energy input by the device itself. Thereby, the

7-

5 construction of the device can be made much simpler, and more reliable.

In a most preferred embodiment of the invention the device is a portable device, i.e. is adapted to be placed into a dishwashing machine at any suitable place, for  
10 example in the plate space of the lower rack of a dishwashing machine. It is not required to specifically mount or fix the device within the machine and/or to connect it to the electronics or mechanics thereof. The device is also preferably self-standing meaning that it  
15 does not require any specific connection with the machine to work properly.

The way of operation of the device of the present invention involves protection of the opened package or ejected unit dose from access of water or wash liquor  
20 until desired during the washing cycle. Therefore, it is necessary to provide for additional means for delay of such release, as proposed by the present invention.

In use, it has to be made sure that the detergent units in e.g. the blister pack are protected from access of  
25 water or wash liquor until the point in time when opening of the package or ejection of the tablet therefrom is desired. For accomplishing this, the package of the unit dose may be made of waterproof plastics material. Alternatively, the housing may be constructed in a  
30 waterproof manner to avoid any access of water or wash

8-

- 5    liquor thereinto for protection of the unit doses stored therein.

For easier understanding, the invention is now described in more detail by way of example, with reference to the accompanying drawings in which:

- 10   Fig. 1 is a plan view of one embodiment of the device according to the invention, loaded with a blister pack of detergent tablets;

Fig. 2 is a cross-sectional view along line A-A of Fig. 1;

- 15   Fig. 3 is a cross-sectional view along line B-B of Fig. 2;

Fig. 4 is a perspective view of the device of Fig. 1 without the blister pack;

- Fig. 5 is a plan view of another embodiment of the device  
20   according to the present invention, loaded with a blister pack of detergent tablets;

Fig. 6 is a cross-sectional view along line A-A of Fig. 5; and

9 -

- 5 Fig. 7 is a perspective view of the device according to Fig. 5 without the blister pack.

Now first referring to the embodiment as illustrated in Figs. 1 to 4, a blister pack 1 of a plurality of unit doses, namely tablets 2, is shown. This blister pack 1 is  
10 made of a circular wheel-like plate 3 of plastics material with deep-drawn compartments 4 along the circumference thereof to receive and hold the tablets. The plate 3 including the filled compartments 4 is covered by a foil 5 of plastics material. For ejection of  
15 the tablets from the compartments during operation of the device, weakening lines (not shown) or the like may be provided for around each single compartment 4.

An alternative embodiment of a blister pack (not shown) may be comprised of a row of individually packaged unit  
20 doses formed into a loop before or when loading into the device. In this case, the device of the present invention might have a different shape, i.e. not circular, but more elongate. The blister pack may e.g. have a form resembling a tank-track. Other forms and shapes of the  
25 blister pack and the device are within the scope of the present claims and may be considered as appropriate by someone skilled in the art.

The blister pack 1 is loaded by the user into a device comprising a housing 10, which is shown, without the  
30 blister pack, in Fig. 4, and, in a state loaded with the blister pack located over the central hub 11 thereof in

10-

5 Fig. 1. The blister pack 1 is also partly located onto the blister-indexing pawl 14, which is part of the operating lever 15, the function of which is explained herein below. After loading the blister pack 1 into the device, a cover 13 is put in place to close the housing  
10 10. In the drawings, the housing 10 is shown to be of transparent plastics material. The housing may, however, be made, in part or total, of opaque material.

For ejection of a tablet 2 from one of the compartments 4 of the blister pack 1, the operating lever 15 is pushed  
15 by the user against stop 16. Thereby, the operating lever 15 rotates a crank 17 through gear teeth (not shown) on the lower edge of the operating lever 15, which pushes, via a push rod 18, an ejector 19. The ejector 19 slides under the adjacent compartment 4 of the blister pack 1,  
20 ejecting a tablet 2 through the foil 5 covering the blister pack 1 and into a holding pocket 20 (see Fig. 2). By force of gravity, the tablet 2 then falls down onto trap door 21 closing holding pocket 20 at the lower end thereof.

25 On release of the operating lever 15 by the user, it returns by force of a spring member 23 to its original position. In the process, it indexes by way of the blister-indexing pawl 14 the blister pack 1 through a respective angle to bring the next tablet-containing  
30 compartment 4 into a dispensing position adjacent to ejector 19. The blister return stop 24 has a similar ramp to the pawl 14, which keeps the blister pack 1 rotating in a clock-wise direction.

11 -

5 Simultaneously, to the return of the operating lever 15, the ejector 19 is drawn back towards its original position. To avoid the ejector 19 to hit the adjacent compartment(s) 4 of the blister pack 1 during this procedure, a cam track 25 is included in the ejector 19  
10 which guided by a pin 26 being part of the housing 10 allows it to move freely.

The device is now in a state activated by the user the tablet sitting on the trap door 21 of the holding pocket 20. To avoid access of water or wash liquor at this  
15 stage, the trap door 21 is, in the specific embodiment described, held shut by a bimetal catch 27. This bimetal catch bends when a specific temperature is reached in the dishwashing machine, e.g. around 35°C, to allow the trap door 21 to open and the tablet 2 to be released into the  
20 dishwashing machine. As a matter of course, opening of the holding pocket 20 may be accomplished in a different way, although a temperature triggered bimetal catch may be preferred as being easy and reliable. The opening of the trap door 21 may, of course, also be time controlled,  
25 e.g. open within a specific time period after activation of the device by the user.

It is, of course, not required that the tablet 2 is completely ejected from the pocket 4 in the blister pack 1 into the holding pocket 20. It can, for example, also  
30 be sufficient to destroy at least part of the walls of the package or compartment 4, including the covering foil 5, by a piercing mechanism operated, for example, in a similar way as the ejector of the present embodiment.

12 -

- 5 Then, during the operation of the dishwashing machine, a door or flap, for example again operated by a bimetal, may be opened to allow access of water or wash liquor into the device and to the contents of the compartment, then dissolving the tablet therefrom.
- 10 The embodiment of Figs. 5 to 7 is very similar in operation as the embodiment just described hereinabove. Similar components are designated by the same reference numerals with a stroke, such as 10' for the housing. In this case the ejector 19' has a different profile,
- 15 designed to push a tablet 2' from the compartment 4' of a blister pack 1' radially outwards. The tablet then falls into a holding pocket 20' above sieve 28' in the housing 10' and is stopped from falling onto the sieve by a trap door 21', again latched by a bimetal catch 27' which will
- 20 work in the same way as the trap door 21 in the embodiment of Figs. 1 to 4, i.e. open upon rise of the temperature in the dishwashing machine to e.g. 35°C, to allow the tablet to fall onto the sieve 28' to then allow access of water or wash liquor dissolving the tablet.
- 25 The features disclosed in the foregoing description, in the claims and/or drawings may both separately and in any combination thereof be material for realizing the invention in diverse forms thereof.

13 -

5

Claims

1. Device for receiving and holding a plurality of unit doses of a detergent composition and/or additive and for individually dispensing said unit doses into an automatic dishwashing machine over a plurality of washing cycles, wherein the device comprises

(i) a housing (10; 10') adapted to receive said plurality of unit doses (2; 2') each separately contained in a package or compartment thereof (4, 5; 4', 5');

15 (ii) means (19; 19') for opening said package or compartment (4, 5; 4', 5') or for at least partly ejecting said unit dose (2; 2') therefrom; and

20 (iii) means (21; 21') to allow access of water or wash liquor to said unit dose (2; 2') contained in the opened package or compartment (4, 5; 4', 5') or ejected therefrom within a controlled time period after opening thereof to allow dissolution of the unit dose into the water or wash liquor of the machine.

25 2. Device according to claim 1, wherein a holding pocket (20; 20') is provided to receive and hold said unit dose (2; 2'), if ejected from the package or compartment (4, 5; 4', 5'), and means (21; 21') to



14-

5        controllably open and close the access of water or  
wash liquor to said holding pocket.

3. Device according to claim 1, wherein the access of  
water or wash liquor to said unit dose (2; 2'), if  
contained in the opened package or compartment (4, 5;  
10    4', 5'), is accomplished by a passageway between the  
interior of the machine and the opened package or  
compartment, said device having means to controllably  
open and close said passageway.

4. Device according to claim 2 or 3, wherein the holding  
15    pocket or passageway is provided with a hinged or  
sliding door (21; 21').

5. Device according to any of the preceding claims,  
wherein the access of water or wash liquor to said  
unit dose (2; 2') contained in the opened package or  
20    compartment (4, 5; 4', 5') or ejected therefrom is  
controlled by means reactive to a condition reached  
during the washing cycle of the machine.

6. Device according to claim 5, wherein the access of  
water or wash liquor to said unit dose (2; 2')  
25    contained in the opened package or compartment (4, 5;  
4', 5') or ejected therefrom is controlled by means  
(27; 27') reactive to the specific temperature of the  
wash liquor.

15 -

- 5 7. Device according to any of claims 1 to 4, wherein the access of water or wash liquor to said unit dose (2; 2') contained in the opened package or compartment (4, 5; 4', 5') or ejected therefrom is time controlled.
- 10 8. Device according to any of the preceding claims, wherein said means for ejecting the unit dose (2; 2') from said package or compartment (4, 5; 4', 5') comprises an ejector (19; 19') to act on at least one face of said package or compartment.
- 15 9. Device according to any of claims 1 to 7, wherein said means for opening said package or compartment (4, 5; 4', 5') comprises a piercing or cutting means to penetrate at least one of the package or compartment walls.
- 20 10. Device according to any of the preceding claims, wherein said housing (10; 10') is adapted to receive a blister pack (1; 1') comprising said plurality of unit doses (2; 2').
- 25 11. Device according to any of the preceding claims, being adapted to be a portable, preferably self-standing, device.
12. Blister pack for use with a device according to any of the preceding claims.

16-

- 5 13. Blister pack according to claim 12, being in the  
form of a wheel-like plate (3; 3') with the unit doses  
(2; 2') arranged in at least one circle along the  
circumference thereof.
- 10 14. Blister pack according to claim 12, being in the  
form of a row of unit doses (2; 2') arranged in a  
flexible loop.
- 15 15. Blister pack according to any of claims 12 to 14,  
wherein the unit dose is a detergent or detergent  
additive tablet.
- 15 16. Blister pack according to any of claims 12 to 14,  
wherein the unit dose is a detergent or detergent  
additive gel.

17-

5

AbstractImprovements in or relating to a Container

The present invention is directed to a device for receiving and holding a plurality of unit doses of a detergent composition and/or additive and for  
10 individually dispensing said unit doses into an automatic dishwashing machine over a plurality of washing cycles, wherein the device comprises (i) a housing adapted to receive said plurality of unit doses each separately contained in a package or compartment thereof, (ii) means  
15 for opening said package or compartment or for at least partly ejecting said unit dose therefrom; and (iii) means to allow access of water or wash liquor to said unit doses contained in the opened package or compartment or ejected therefrom within a controlled time period after  
20 opening thereof to allow dissolution of the unit dose into the water or wash liquor of the machine, as well as to a blister pack for use therewith.

25

30

1/4

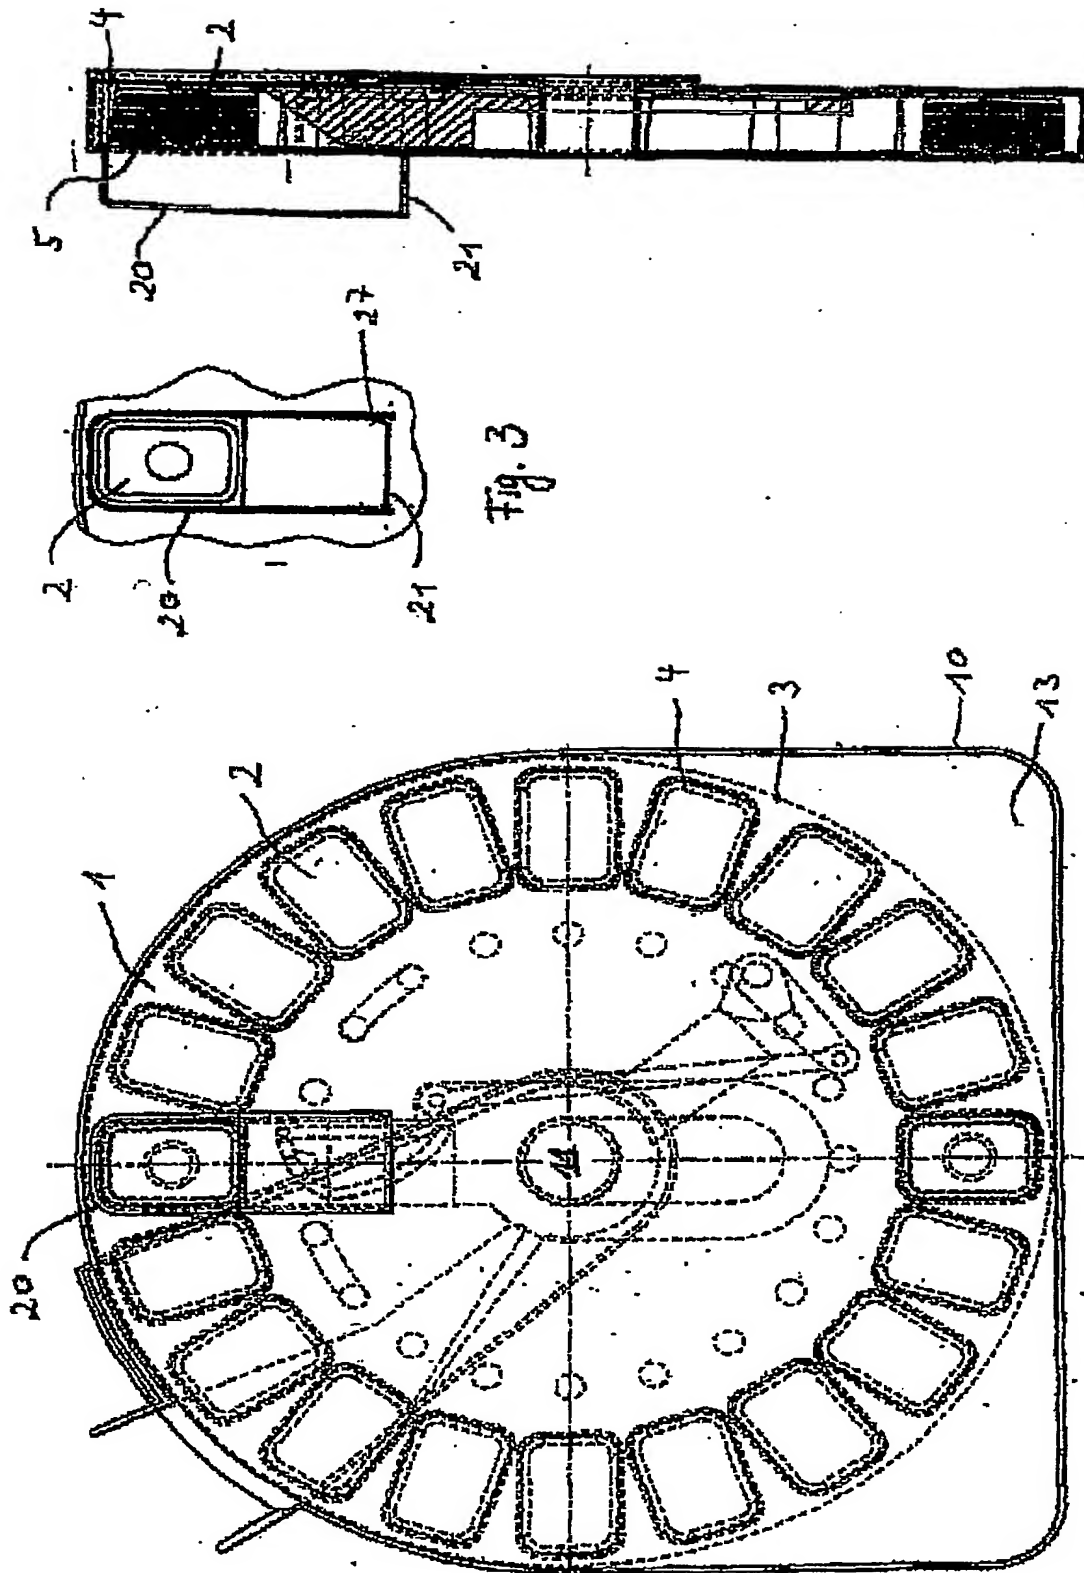


Fig. 2

Fig. 3

Fig. 1

2/4

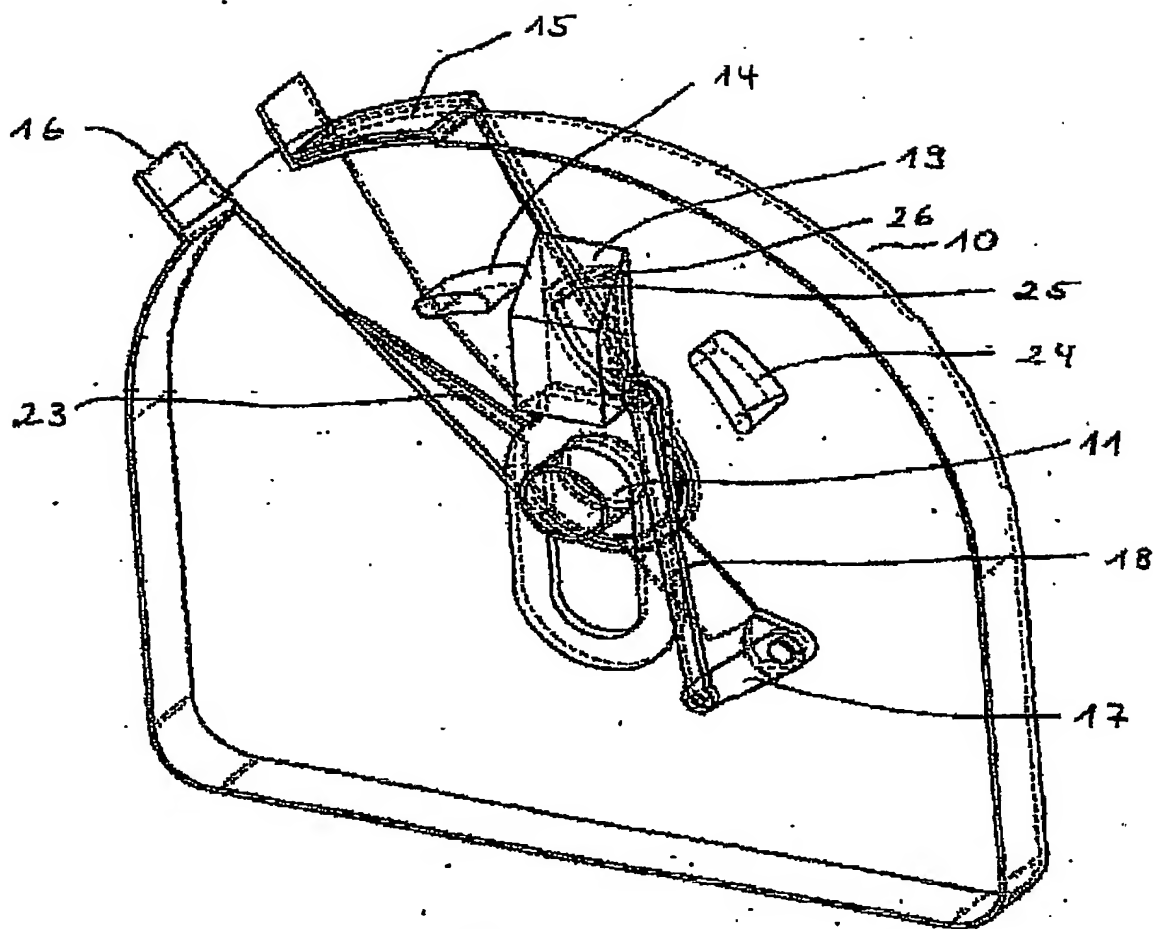


Fig. 4

BEST AVAILABLE COPY

3/4

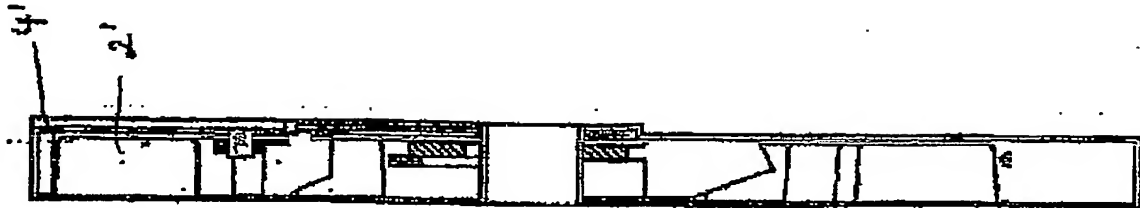


Fig. 6

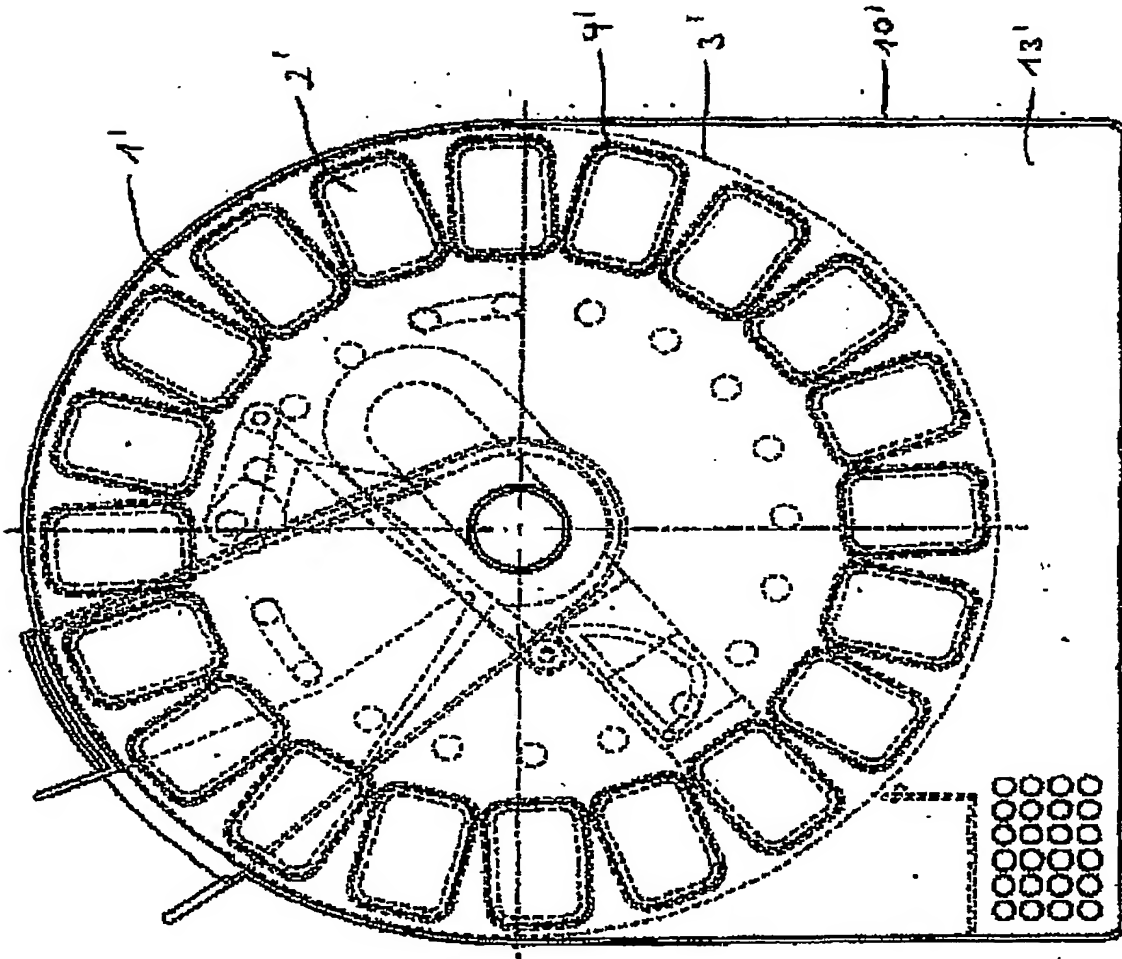


Fig. 5

BEST AVAILABLE COPY

4/4

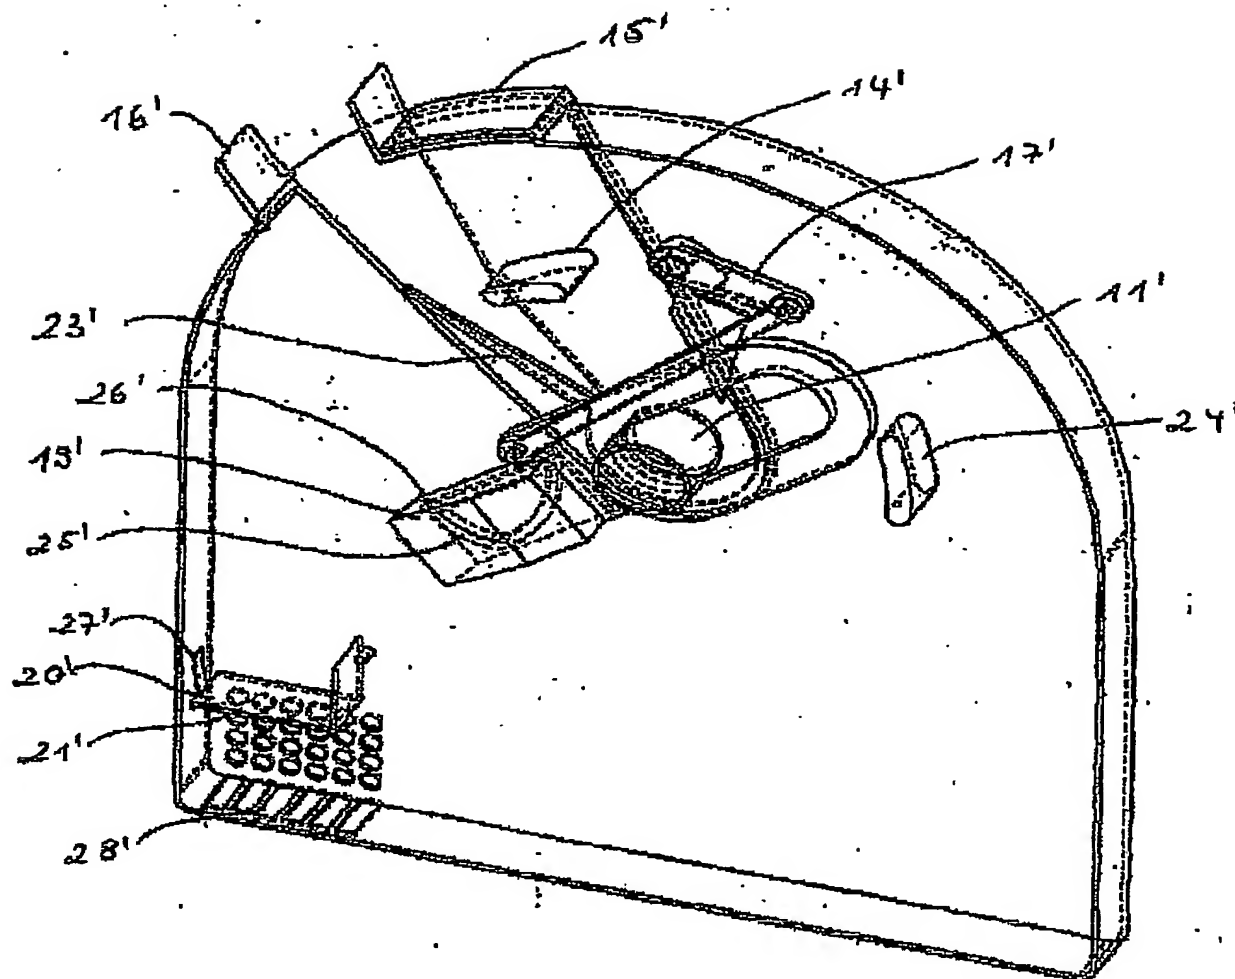


Fig. 7